




Relés de Sobrecarga

Chave de Código

ELRT - 18 - 4

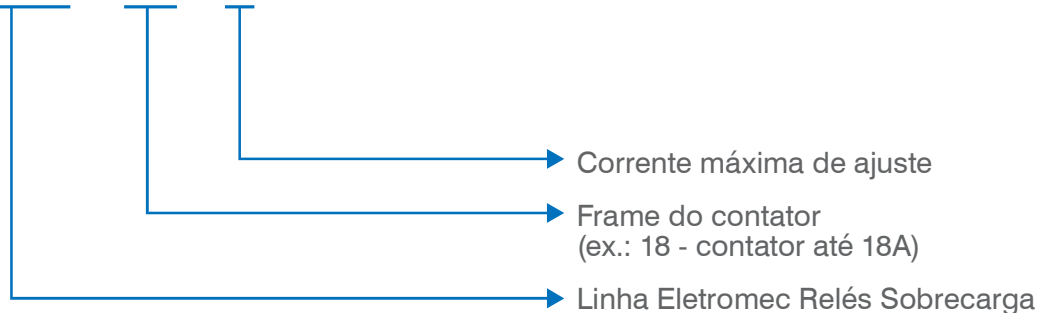

Linha Eletromec


Relés de Sobrecarga - Dados técnicos

Relé Sobrecarga ELRT


Corrente Nominal AC3	Faixa de ajuste Ir (A)	Contatos Aux.	Usar com	Referência
0,16A	0.1-0.16A	1NA+1NF	ELCT09 ~18	ELRT18-0-16
0,25A	0.16-0.25A	1NA+1NF	ELCT09 ~18	ELRT18-0-25
0,4A	0.25-0.4A	1NA+1NF	ELCT09 ~18	ELRT18-0-4
0,63A	0.4-0.63A	1NA+1NF	ELCT09 ~18	ELRT18-0-63
1A	0.63-1A	1NA+1NF	ELCT09 ~18	ELRT18-1
1,6A	1-1.6A	1NA+1NF	ELCT09 ~18	ELRT18-1-6
2A	1.25-2A	1NA+1NF	ELCT09 ~18	ELRT18-2
2,5A	1.6-2.5A	1NA+1NF	ELCT09 ~18	ELRT18-2-5
4A	2-4A	1NA+1NF	ELCT09 ~18	ELRT18-4
6A	4-6A	1NA+1NF	ELCT09 ~18	ELRT18-6
8A	5-8A	1NA+1NF	ELCT09 ~18	ELRT18-8
10A	7-10A	1NA+1NF	ELCT09 ~18	ELRT18-10
13A	9-13A	1NA+1NF	ELCT09 ~18	ELRT18-13
18A	12-18A	1NA+1NF	ELCT09 ~18	ELRT18-18
25A	17-25A	1NA+1NF	ELCT09 ~18	ELRT18-25
32A	23-32A	1NA+1NF	ELCT25 ~32	ELRT32-32
36A	28-36A	1NA+1NF	ELCT25 ~32	ELRT32-36
32A	23-32A	1NA+1NF	ELCT40 ~95	ELRT95-32
40A	30-40A	1NA+1NF	ELCT40 ~95	ELRT95-40
50A	37-50A	1NA+1NF	ELCT40 ~95	ELRT95-50
65A	48-65A	1NA+1NF	ELCT40 ~95	ELRT95-65
70A	55-70A	1NA+1NF	ELCT40 ~95	ELRT95-70
80A	63-80A	1NA+1NF	ELCT40 ~95	ELRT95-80
93A	80-93A	1NA+1NF	ELCT40 ~95	ELRT95-93

Dimensões

ELRT18

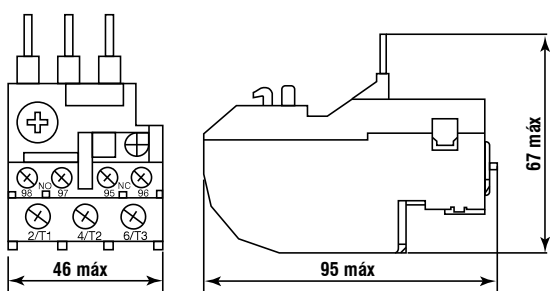

ELRT32

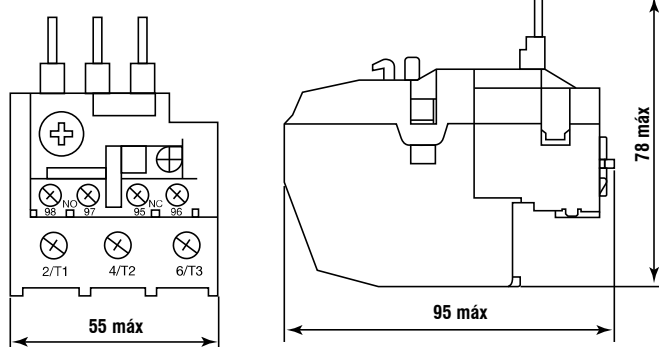

ELRT95

