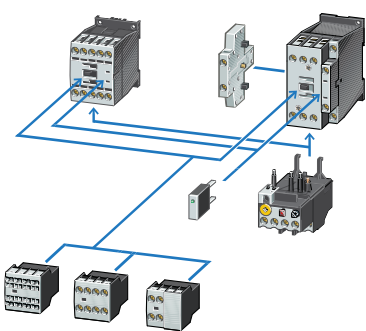
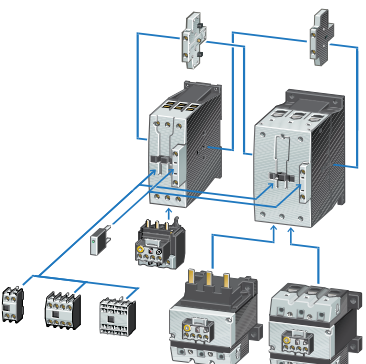
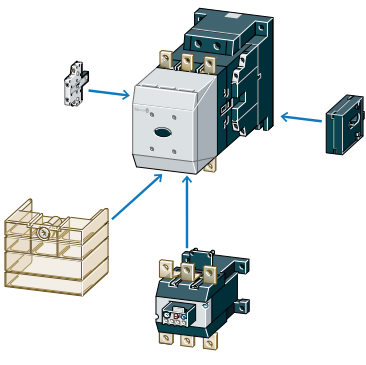


DILM

Contatores Tripolares

Contatores tripolares DILM

Esquema Técnico	Minicontator Auxiliar				Módulo de Contato Auxiliar		Relé Térmico		
	Foto	In - AC (A)	In - AC1 @40°C (A)	In - AC4 (A)	Referência	Contatos	Referência	Range de Ajuste (A)	Referência
		7	22	5	DILM 7-10(...) DILM 7-01(...)	1NA + 1NF 2NA + 2NF 3NA + 1NF	DILM32-XH11 DILM32-XH12 DILM32-XH13	0,1 - 0,16 0,16 - 0,24 0,24 - 0,4 0,4 - 0,6 0,6 - 1,0 1,0 - 1,6	ZB12-0,16 ZB12-0,24 ZB12-0,4 ZB12-0,6 ZB12-1,0 ZB12-1,6
		9	22	6	DILM 9-10(...) DILM 9-01(...)			1,6 - 2,4 2,4 - 4,0 4,0 - 6,0 6,0 - 10	ZB12-2,4 ZB12-4 ZB12-6 ZB12-10
		12	22	7	DILM 12-10(...) DILM 12-01(...)	2NA 4NA 2NF 4NF	DILA-XH120 DILA-XH140 DILA-XH102 DILA-XH104		
		15	22	7	DILM 15-10(...) DILM 15-01(...)	1NA + 1NF 2NA + 2NF 1NA + 3NF 3NA + 3NF	DILA-XH11 DILA-XH12 DILA-XH13 DILA-XH131	9,0 - 12 12 - 16	ZB12-12 ZB12-16
		18	40	10	DILM 17-10(...) DILM 17-01(...)		Contatos auxiliares frontais - Normal	0,1 - 0,16 0,16 - 0,24 0,24 - 0,4 0,4 - 0,6	ZB32-0,16 ZB32-0,24 ZB32-0,4 ZB32-0,6
		25	45	13	DILM 25-10(...) DILM 25-01(...)	1NA + 1NF* 2NA + 2NF*	DILA-XH11* DILA-XH12* * 1 NA avançado e 1 NF atrasado	0,6 - 1,0 1,0 - 1,6 1,6 - 2,4 2,4 - 4,0 4,0 - 6,0	ZB32-1,0 ZB32-1,6 ZB32-2,4 ZB32-4 ZB32-6
		32	45	15	DILM 32-10(...) DILM 32-01(...)	1NA + 1NF	DILM32-XH11-S Contato auxiliar lateral somente para os modelos DILM 17 a DILM 38	6,0 - 10 9,0 - 12 12 - 16 16 - 24 24 - 32 32 - 38	ZB32-10 ZB32-16 ZB32-24 ZB32-32 ZB32-38
		38	45	15	DILM 38-10(...) DILM 38-01(...)				
		40	60	18	DILM 40 (...)	2NA 4NA	DILM150-XH120 DILM150-XH140	6,0 - 10 10 - 16	ZB65-10 ZB65-16
		50	80	21	DILM 50 (...)	2NF 4NF	DILM150-XH102 DILM150-XH104	16 - 24 24 - 40	ZB65-24 ZB65-40
		65	98	25	DILM 65 (...)	1NA + 1NF 2NA + 2NF	DILM150-XH11 DILM150-XH12	40 - 57 57 - 65	ZB65-57 ZB65-65
		72	98	25	DILM 72 (...)	1NA + 3NF 3NA + 1NF 2NA + 2NF*	DILM150-XH13 DILM150-XH131 DILM150-XH122	65 - 72	ZB65-72
		80	110	40	DILM 80 (...)		Contatos auxiliares frontais - Normal	25 - 35 35 - 50 50 - 70	ZB150-35 ZB150-50 ZB150-70
		95	130	50	DILM 95 (...)		DILM1000-XH11-S1 DILM1000-XH11-SA	70 - 100 95 - 125	ZB150-100 ZB150-125
		115	160	55	DILM 115 (...)	1NA + 1NF 1NA + 1NF	Contato auxiliar lateral - Normal	120 - 150 150 - 175	ZB150-150 ZB150-175
		150	190	65	DILM 150 (...)		DILM1000-XH11-S1* * 1 NA avançado e 1 NF atrasado		
		170	225	65	DILM 170 (...)	1NA + 1NF*			
			185	337	136	DILM 185-S/22(...) DILM 185/22(...)			
		225	386	164	DILM 225-S/22(...) DILM 225/22(...)				
		250	429	200	DILM 250-S/22(...) DILM 250/22(...)				
		300	490	240	DILM 300-S/22(...) DILM 300/22(...)	1NA + 1NF	DILM1000-XH11-S1 DILM1000-XH11-SA		
		400	612	296	DILM 400-S/22(...) DILM 400/22(...)	1NA + 1NF	Contato auxiliar lateral - Normal		
		500	857	360	DILM 500-S/22(...) DILM 500/22(...)		DILM1000-XH11-S1* * 1 NA avançado e 1 NF atrasado		
		580	980	456	DILM 580/22 (...)	1NA + 1NF			
		650	1041	512	DILM 650/22 (...)				
		750	1102	576	DILM 750/22 (...)				
		820	1225	656	DILM 820/22 (...)				
		1000	1225	800	DILM 1000/22 (...)				
		1600	2200	1280	DILM 1600/22 (...)				
		-	1714	-	DILH 1400/22 (...)				
		-	2450	-	DILH 2000/22 (...)				

1 - 820

ZEV...
Consultar o catálogo sobre o relé de proteção e motores ZEV

*1NA avançado e 1NF atrasado