

PRCM Series

Cylindrical connector type proximity sensor

■ Features

- Improved the noise resistance with dedicated IC
- Built-in reverse polarity protection circuit (DC 3-wire type)
- Built-in surge protection circuit
- Built-in overcurrent protection circuit (DC type)
- Protection structure IP67 (IEC standard) for connector part
- Replaceable for micro switches and limit switches

⚠ Please read "Caution for your safety" in operation manual before using. **CE**



■ Specifications

● DC 2-wire type

Model	PRCMT12-2DO PRCMT12-2DC PRCMT12-2DO-I PRCMT12-2DC-I	PRCMT12-4DO PRCMT12-4DC PRCMT12-4DO-I PRCMT12-4DC-I	PRCMT18-5DO PRCMT18-5DC PRCMT18-5DO-I PRCMT18-5DC-I	PRCMT18-8DO PRCMT18-8DC PRCMT18-8DO-I PRCMT18-8DC-I	PRCMT30-10DO PRCMT30-10DC PRCMT30-10DO-I PRCMT30-10DC-I	PRCMT30-15DO PRCMT30-15DC PRCMT30-15DO-I PRCMT30-15DC-I
Sensing distance	2mm	4mm	5mm	8mm	10mm	15mm
Hysteresis	Max. 10% of sensing distance					
Standard sensing target	12×12×1mm(Iron)		18×18×1mm(Iron)	25×25×1mm(Iron)	30×30×1mm(Iron)	45×45×1mm(Iron)
Setting distance	0 to 1.4mm	0 to 2.8mm	0 to 3.5mm	0 to 5.6mm	0 to 7mm	0 to 10.5mm
Power supply (Operating voltage)	12-24VDC (10-30VDC)					
Leakage current	Max. 0.6mA					
Response frequency*1	1.5kHz	500Hz	350Hz	400Hz	200Hz	
Residual voltage	Max. 3.5V					
Affection by Temp.	Max. ±10% for sensing distance at ambient temperature 20°C					
Control output	2 to 100mA					
Insulation resistance	Min. 50MΩ(at 500VDC megger)					
Dielectric strength	1500VAC 50/60Hz for 1minute					
Vibration	1mm amplitude at frequency of 10 to 55Hz(for 1 min.) in each of X, Y, Z directions for 2 hours					
Shock	500m/s ² (approx. 50G) in each of X, Y, Z directions for 3 times					
Indicator	Operation indicator(red LED)					
Environment	Ambient temperature	-25 to 70°C, storage: -30 to 80°C				
	Ambient humidity	35 to 95%RH, storage: 35 to 95%RH				
Protection circuit	Surge protection circuit, Overcurrent protection					
Protection	IP67(IEC Standard)					
Material	Case/Nut: Nickel plated Brass, Washer: Nickel plated Iron, Sensing surface: PBT Standard Cable(Black): Polyvinyl chloride(PVC), Oil resistant cable(Gray): Oil resistant Polyvinyl chloride(PVC)					
Approval	CE					
Weight*2	Approx. 38g(approx. 26g)		Approx. 60g(approx. 48g)		Approx. 154g(approx. 142g)	

※1: The response frequency is the average value. The standard sensing target is used and the width is set as 2 times of the standard sensing target, 1/2 of the sensing distance for the distance.

※2: The weight with packaging and the weight in parentheses is only unit weight.

※There is IEC standard connector cable. Refer to the G-6 about IEC standard connector wires and specifications.

※Environment resistance is rated at no freezing or condensation.

Cylindrical Connector type

■ Specifications

● DC 3-wire type

Model	PRCM12-2DN PRCM12-2DP PRCM12-2DN2 PRCM12-2DP2	PRCM12-4DN PRCM12-4DP PRCM12-4DN2 PRCM12-4DP2	PRCM18-5DN PRCM18-5DP PRCM18-5DN2 PRCM18-5DP2 PRCML18-5DN PRCML18-5DP PRCML18-5DN2 PRCML18-5DP2	PRCM18-8DN PRCM18-8DP PRCM18-8DN2 PRCM18-8DP2 PRCML18-8DN PRCML18-8DP PRCML18-8DN2 PRCML18-8DP2	PRCM30-10DN PRCM30-10DP PRCM30-10DN2 PRCM30-10DP2 PRCML30-10DN PRCML30-10DP PRCML30-10DN2 PRCML30-10DP2	PRCM30-15DN PRCM30-15DP PRCM30-15DN2 PRCM30-15DP2 PRCML30-15DN PRCML30-15DP PRCML30-15DN2 PRCML30-15DP2
Sensing distance	2mm	4mm	5mm	8mm	10mm	15mm
Hysteresis	Max. 10% of sensing distance					
Standard sensing target	12×12×1mm(Iron)		18×18×1mm(Iron)	25×25×1mm(Iron)	30×30×1mm(Iron)	45×45×1mm(Iron)
Sensing distance	0 to 1.4mm	0 to 2.8mm	0 to 3.5mm	0 to 5.6mm	0 to 7mm	0 to 10.5mm
Power supply (Operating voltage)	12-24VDC (10-30VDC)					
Current consumption	Max. 10mA					
Response frequency ^{*1}	1.5kHz	500kHz	500kHz	350kHz	400kHz	200kHz
Residual voltage	Max. 1.5V					
Affection by Temp.	Max. ±10% for sensing distance at ambient temperature 20°C					
Control output	Max. 200mA					
Insulation resistance	Min. 50MΩ(at 500VDC megger)					
Dielectric strength	1500VAC 50/60Hz for 1minute					
Vibration	1mm amplitude at frequency of 10 to 55Hz(for 1 min.) in each of X, Y, Z directions for 2 hours					
Shock	500m/s ² (approx. 50G) in each of X, Y, Z directions for 3 times					
Indicator	Operation indicator(red LED)					
Environment	Ambient temperature	-25 to 70°C, storage: -30 to 80°C				
	Ambient humidity	35 to 95%RH, storage: 35 to 95%RH				
Protection circuit	Surge protection circuit, Reverse polarity protection circuit, Overcurrent protection					
Protection	IP67(IEC Standard)					
Material	Case/Nut: Nickel plated Brass, Washer: Nickel plated Iron, Sensing surface: PBT					
Approval	CE					
Weight ^{*2}	Approx. 38g(approx. 26g)		PRCM: Approx. 61g(approx. 49g) PRCML: Approx. 85g(approx. 73g)		PRCM: Approx. 146g(approx. 134g) PRCML: Approx. 181g(approx. 169g)	

● AC 2-wire type

Model	PRCM12-2AO PRCM12-2AC	PRCM12-4AO PRCM12-4AC	PRCM18-5AO PRCM18-5AC PRCML18-5AO PRCML18-5AC	PRCM18-8AO PRCM18-8AC PRCML18-8AO PRCML18-8AC	PRCM30-10AO PRCM30-10AC PRCML30-10AO PRCML30-10AC	PRCM30-15AO PRCM30-15AC PRCML30-15AO PRCML30-15AC
Sensing distance	2mm	4mm	5mm	8mm	10mm	15mm
Hysteresis	Max. 10% of sensing distance					
Standard sensing target	12×12×1mm(Iron)		18×18×1mm(Iron)	25×25×1mm(Iron)	30×30×1mm(Iron)	45×45×1mm(Iron)
Sensing distance	0 to 1.4mm	0 to 2.8mm	0 to 3.5mm	0 to 5.6mm	0 to 7mm	0 to 10.5mm
Power supply (Operating voltage)	100-240VAC (85-264VAC)					
Current consumption	Max. 2.5mA					
Response frequency ^{*1}	20Hz					
Residual voltage	Max. 10V					
Affection by Temp.	Max. ±10% for sensing distance at ambient temperature 20°C					
Control output	5 to 150mA		5 to 200mA			
Insulation resistance	Min. 50MΩ(at 500VDC megger)					
Dielectric strength	2,500VAC 50/60Hz for 1minute					
Vibration	1mm amplitude at frequency of 10 to 55Hz(for 1 min.) in each of X, Y, Z directions for 2 hours					
Shock	500m/s ² (approx. 50G) in each of X, Y, Z directions for 3 times					
Indicator	Operation indicator(red LED)					
Environment	Ambient temperature	-25 to 70°C, storage: -30 to 80°C				
	Ambient humidity	35 to 95%RH, storage: 35 to 95%RH				
Protection circuit	Surge protection circuit					
Protection	IP67(IEC Standard)					
Insulation type	Double insulation or reinforced insulation (Mark: <input type="checkbox"/> , dielectric strength between the measuring input part and the power part: 1kV)					
Material	Case/Nut: Nickel plated Brass, Washer: Nickel plated Iron, Sensing surface: PBT					
Approval	CE					
Weight ^{*2}	Approx. 42g(approx. 30g)		PRCM: Approx. 66g(approx. 54g) PRCML: Approx. 78g(approx. 66g)		PRCM: Approx. 154g(approx. 142g) PRCML: Approx. 194g(approx. 182g)	

※1: The response frequency is the average value. The standard sensing target is used and the width is set as 2 times of the standard sensing target, 1/2 of the sensing distance for the distance.

※2: The weight with packaging and the weight in parentheses is only unit weight.

※ Environment resistance is rated at no freezing or condensation.

(A)
Photo
electric
sensor

(B)
Fiber
optic
sensor

(C)
Door/Area
sensor

(D)
Proximity
sensor

(E)
Pressure
sensor

(F)
Rotary
encoder

(G)
Connector/
Socket

(H)
Temp.
controller

(I)
SSR/
Power
controller

(J)
Counter

(K)
Timer

(L)
Panel
meter

(M)
Tacho/
Speed/
Pulse
meter

(N)
Display
unit

(O)
Sensor
controller

(P)
Switching
mode power
supply

(Q)
Stepper
motor&
Driver&Controller

(R)
Graphic/
Logic
panel

(S)
Field
network
device

(T)
Software


(U)
Other

PRCM Series


■ Dimensions

(unit: mm)


● PRCM12-2D□ / PRCMT12-2D□(-I)

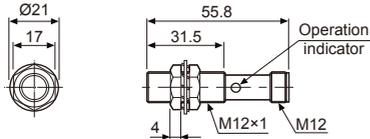


● PRCM12-4D□ / PRCMT12-4D□(-I)

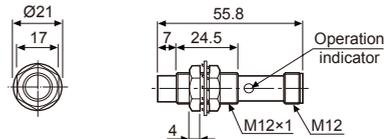


● PRCM18-5D□ / PRCMT18-5D□(-I)

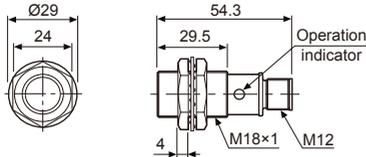


● PRCM18-8D□ / PRCMT18-8D□(-I)

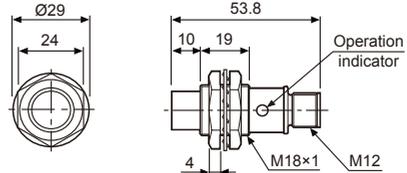


● PRCM30-10D□ / PRCMT30-10D□(-I)

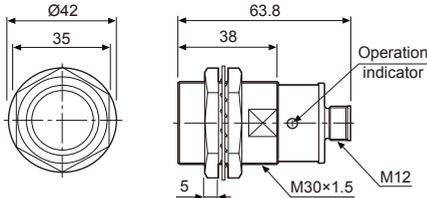


● PRCM30-15D□ / PRCMT30-15D□(-I)

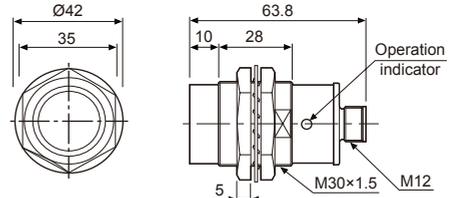


● PRCM12-2A□

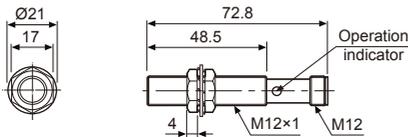


● PRCM12-4A□

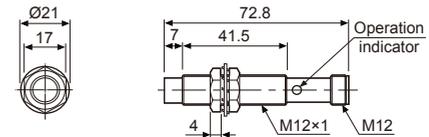


● PRCM18-5A□

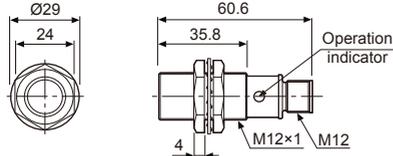


● PRCM18-8A□

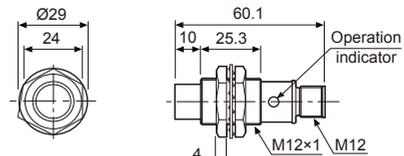


● PRCM30-10A□

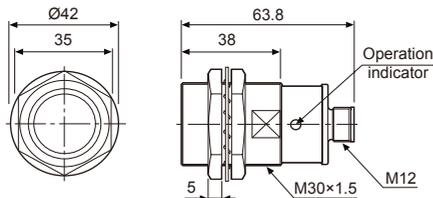


● PRCM30-15A□

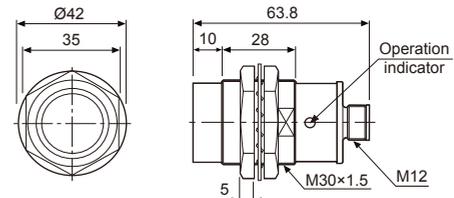


● PRCML18-5D□ / PRCML18-5A□

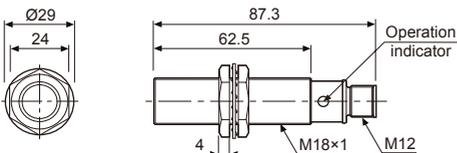


● PRCML18-8D□ / PRCML18-8A□

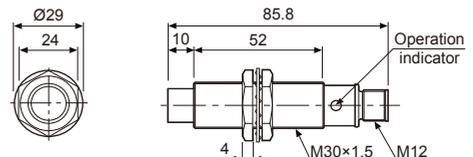

● PRCML18-5D□ / PRCML18-5A□

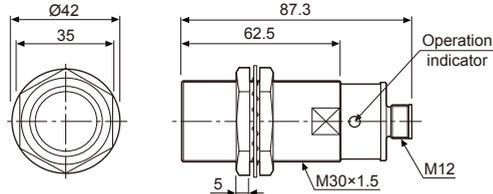


● PRCML30-15D□ / PRCML30-15A□

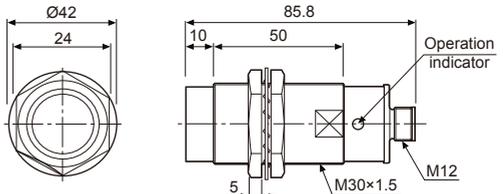


Cylindrical Connector type

Control output diagram



DC 2-wire type

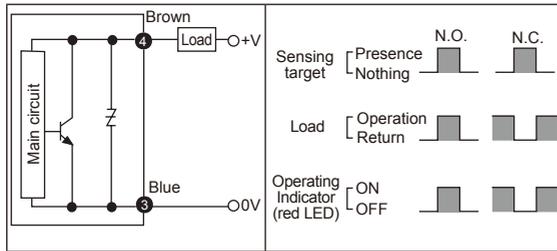

DC 3-wire type

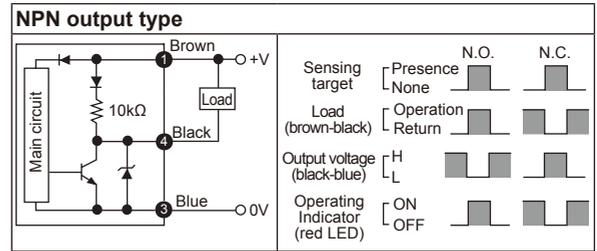


AC 2-wire type

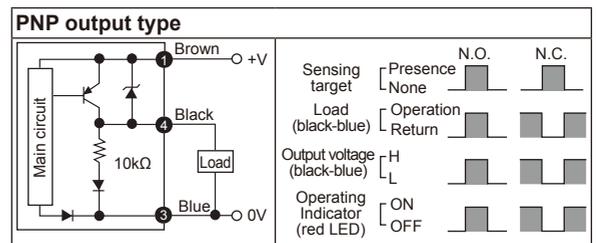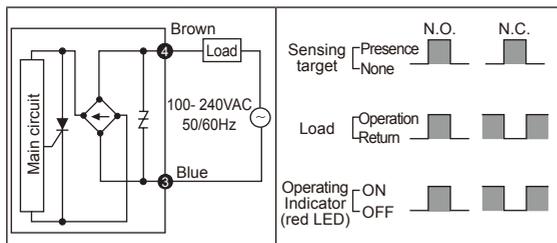

※ The number in a circle is pin no. of connector.

Wiring diagram


DC 2-wire type(Standard type)

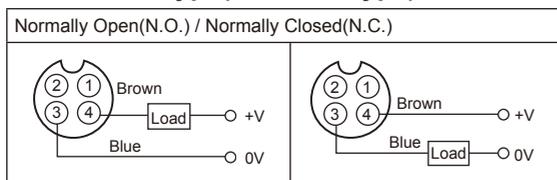

※ Pin ①, ② are not used terminals.

※ For DC 3-wire type connector cable, it is available to use with black wire(12-24VDC) and blue wire(0V).

DC 2-wire type(IEC standard type)

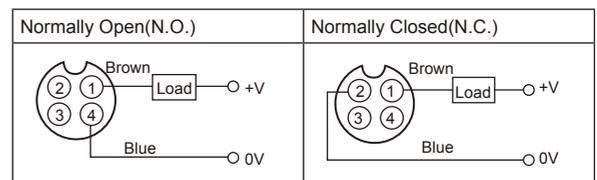

※ ②, ③ of N.O. type and ③, ④ of N.C. type are not used terminals.

※ The pin arrangement of connector applying IEC standard is being developed.

※ Please attach "I" at the end of the name of standard type for purchasing the IEC standard product.


Ex) PRDWT12-4DO-I

※ The connector cable for IEC standard is being developed.

Please attach "I" at the end of the name of standard type.


Ex) CID2-2-I, CLD2-5-I

DC 3-wire type

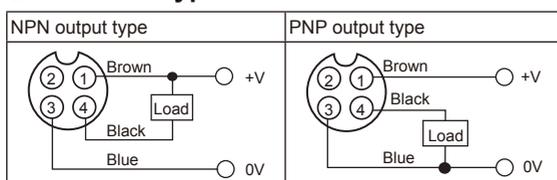

※ Please fasten the cleat of connector not to show the thread. (0.39 to 0.49N·m)

AC 2-wire type

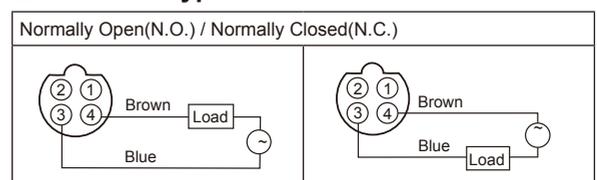

※ In AC inductive type, ② and ③, ① and ④ are connected inside of the connector cable.

※ Please fasten the vibration part with Teflon tape.


※ Refer to the G-6 about IEC standard connector wires and specifications.

(A)	Photo electric sensor
(B)	Fiber optic sensor
(C)	Door/Area sensor
(D)	Proximity sensor
(E)	Pressure sensor
(F)	Rotary encoder
(G)	Connector/Socket
(H)	Temp. controller
(I)	SSR/Power controller
(J)	Counter
(K)	Timer
(L)	Panel meter
(M)	Tacho/Speed/Pulse meter
(N)	Display unit
(O)	Sensor controller
(P)	Switching mode power supply
(Q)	Stepper motor& Driver&Controller
(R)	Graphic/Logic panel
(S)	Field network device
(T)	Software
(U)	Other


PRCM Series

■ Proper usage


◎ Load connections

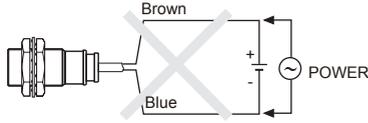

< DC 2-wire type & AC 2-wire type >



< DC 2-wire type >

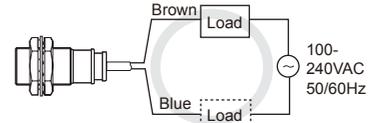


< AC 2-wire type >

When using DC or AC 2-wire type proximity sensor, the load must be connected, otherwise internal components may be damaged. The load can be connected to either wire.

◎ Load connections

● AC 2-wire type



110VAC : Min. 20kΩ 3W
220VAC : Min. 39kΩ 10W

It may cause return failure of load by residual voltage. If the load current is under 5mA, please make sure the residual voltage is less than the return voltage of the load by connecting a bleeder resistor in parallel with the load as shown in the diagram.

$$R = \frac{V_s}{I} (\Omega) \quad P = \frac{V_s^2}{R} (W)$$

[I: Action current of load, R: Bleeder resistance, P: Permissible power]


Please make the current on proximity sensor smaller than the return current of load by connecting a bleeder resistor in parallel.

※ W value of Bleeder resistor should be bigger for proper heat dissipation.

$$R = \frac{V_s}{I_o - I_{off}} (\Omega) \quad P = \frac{V_s^2}{R} (W)$$


[Vs : Power supply, I_o : Min. action current of proximity sensor, I_{off} : Return current of load, P : Number of Bleeder resistance watt]

● DC 2-wire type




◎ Mutual-interference & Influence by surrounding metals

When several proximity sensors are mounted close to one another a malfunction of the may be caused due to mutual interference. Therefore, be sure to keep a minimum distance between the two sensors as below chart indicates.

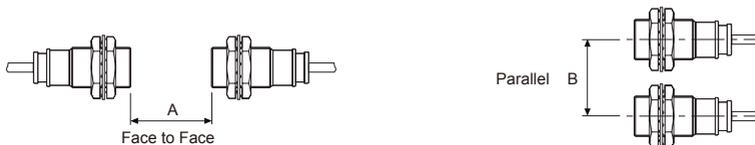

When sensors are mounted on metallic panel, it is required to protect the sensors from being affected by any metallic object except target. Therefore, be sure to provide a minimum distance as below chart indicates.

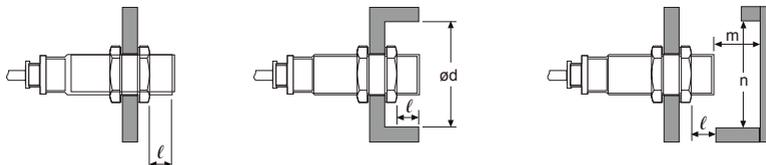

(unit: mm)

Model	PRCMT12-2D□ PRCM12-2D□ PRCM12-2A□	PRCMT12-4D□ PRCM12-4D□ PRCM12-4A□	PRCMT18-5D PRCM(L)18-5D PRCM(L)18-5A	PRCMT18-8D□ PRCM(L)18-8D□ PRCM(L)18-8A□	PRCMT30-10D□ PRCM(L)30-10D□ PRCM(L)30-10D□	PRCMT30-15D PRCM(L)30-15D PRCM(L)30-15A
A	12	24	30	48	60	90
B	24	36	36	54	60	90
ℓ	0	11	0	14	0	15
ød	12	36	18	54	30	90
m	6	12	15	24	30	45
n	18	36	27	54	45	90